

Battery table lamp made of steel and aluminium with an adjustable, pivoting arm. The head can rotate 360°. The light source is a 2,5 W LED, controlled by a touch sensor on the base.



## Finishing

### Standard

● Black soft-touch

○ Matt white

● Brushed nickel


### Special

● Metallic bronze

All RAL coating and galvanic finishes available upon request

## Light emission

- **Light emission:** diffuse
- **Light direction:** downlight
- **Light source:** LED board
- **Source flux:** 233 lm
- **Emitted flux:** 186 lm
- **Efficacy:** 80 lm/W
- **CCT:** 2700 K
- **CRI index:** >90
- **Lifetime:** >50000h L70 @ 25°C



## Electric facts

- **Source power:** 2,5 W
- **Power absorption:** 2,5 W
- **Stand-by absorption:** < 0,1 W
- **Dimmability:** internal touch dimmer
- **Energy class:** A++

Operating time:  
6h (100% power) - 22h (25% power)

Autosaving mode time (in addition to operating time):  
2h (15% power)

Batteries : 2 x 18650 rechargeable LI-ION cells


Charging Time (0-100 %) : 5h

## Technical data

- **Environment:** indoor
- **Placement:** table/desk
- **Net weight:** 1,2 Kg
- **Certifications:** CE
- **Suggested ambient:** 25 °C
- **Maximum ambient T:** 40 °C
- **Insulation class:** III
- **Protection class:** IP20

## Packaging

- **Material:** cardboard box
- **Dimensions:** 21 x 21 x 27 (cm)
- **Volume:** 0,012 m<sup>3</sup>
- **Gross weight:** 3 Kg (with USB-C wallmount adapter)

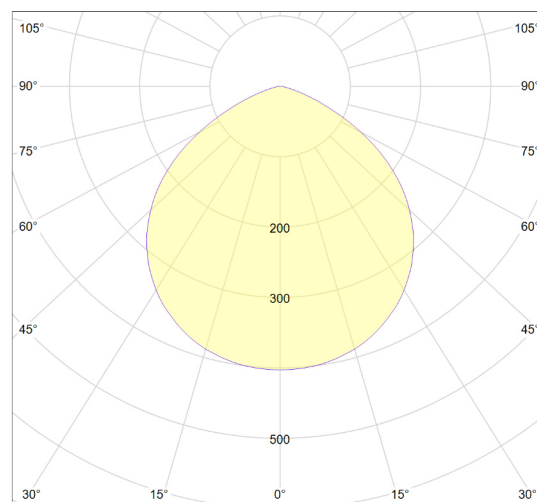

Battery table lamp made of steel and aluminium with an adjustable, pivoting arm. The head can rotate 360°. The light source is a 2,5 W LED, controlled by a touch sensor on the base.



## Finishing

### Standard

● Black soft-touch

○ Matt white

● Brushed nickel


### Special

● Metallic bronze

All RAL coating and galvanic finishes available upon request

## Light emission

- **Light emission:** diffuse
- **Light direction:** downlight
- **Light source:** LED board
- **Source flux:** 240 lm
- **Emitted flux:** 194 lm
- **Efficacy:** 80 lm/W
- **CCT:** 3000 K
- **CRI index:** >90
- **Lifetime:** >50000h L70 @ 25°C



## Electric facts

- **Source power:** 2,5 W
- **Power absorption:** 2,5 W
- **Stand-by absorption:** < 0,1 W
- **Dimmability:** internal touch dimmer
- **Energy class:** A++

Operating time:  
6h (100% power) - 22h (25% power)

Autosaving mode time (in addition to operating time):  
2h (15% power)

Batteries : 2 x 18650 rechargeable LI-ION cells

Charging Time (0-100 %) : 5h

## Technical data

- **Environment:** indoor
- **Placement:** table/desk
- **Net weight:** 1,2 Kg
- **Certifications:** CE
- **Suggested ambient:** 25 °C
- **Maximum ambient T:** 40 °C
- **Insulation class:** III
- **Protection class:** IP20

## Packaging

- **Material:** cardboard box
- **Dimensions:** 21 x 21 x 27 (cm)
- **Volume:** 0,012 m<sup>3</sup>
- **Gross weight:** 3 Kg (with USB-C wallmount adapter)

