




tesechzehn | ts-str2-600 /-1200

LINEARLEUCHTE FÜR STROMSCHIENEN

Lineare Stromschienenleuchte
geeignet für Flächenbeleuchtung und Wegebeleuchtung

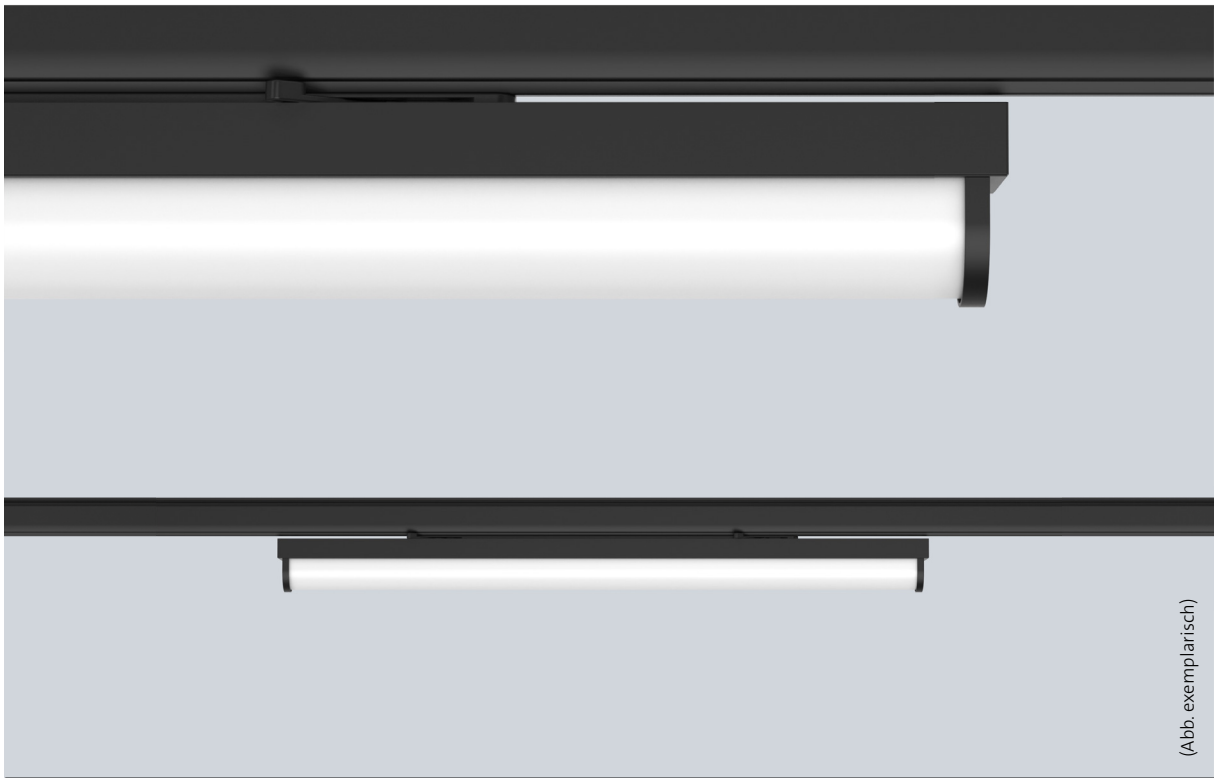

Design: Dirk Salewski, mawa

Matchcode	Leistungsvarianten in W ^{LED}	Abstrahlwinkel in Grad	Dimmungen Matchcode	Lichtfarben und Lichtstrom in Kelvin und Lumen ^{LED}
ts-str2-600	21 W	diffus	-1, -4	2700 K / 2514 lm, 3000 K / 2640 lm
ts-str2-1200	42 W	diffus	-1, -4	2700 K / 5029 lm, 3000 K / 5280 lm

(weitere Lichtfarben auf Anfrage)


Matchcode-Kürzel für Dimmungen: -1 schaltbar / -4 DALI



tesechzehn | ts-str2-600 /-1200

LINEARLEUCHTE FÜR STROMSCHIENEN

Dimensionen:

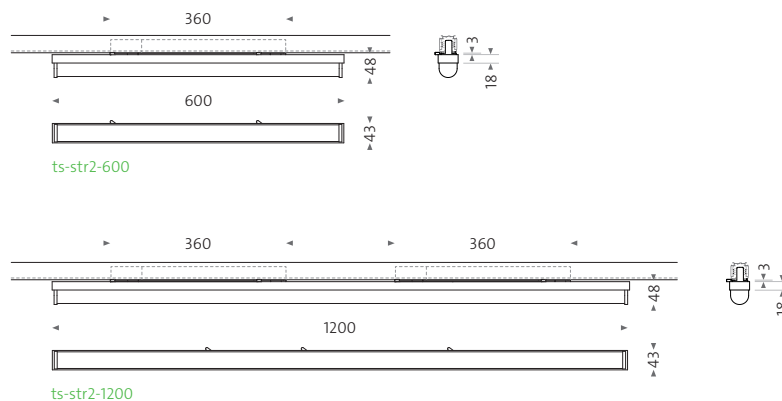

Farbe:

- ☐ weiß matt (RAL 9016)
- ☐ schwarz matt (RAL 9005)
- individuelle RAL-Farben auf Anfrage


Gehäuse:	Aluminium pulverbeschichtet, Gehäuse mit Diffusorscheibe aus satiniertem PMMA
Adapter:	1 × Allokating 3-Phasen-Adapter Die Produkte sind für den Einsatz in den Powergear-3-Phasen-Stromschienen PRO-06 und PRO-R6 geeignet.
Lichtquelle:	ts-str2-600: LED-Module / Ra > 95 ts-str2-1200: LED-Module / Ra > 95
Lebensdauer:	L80 > 50.000 h (IES LM-80 / TM-21)
Betriebsgerät:	inklusive
Betriebsbereich:	AC 220V–240V / 50Hz–60Hz
Schutzklasse:	I
Schutzart:	IP20
Gewicht:	ts-str2-600: ca. 1.124 g ts-str2-1200: ca. 1.924 g



tesechzehn | ts-str2-600 /-1200

LINEAR LUMINAIRE FOR TRACK SYSTEMS

Linear track-mounted luminaire
Suitable for general area lighting and pathway illumination

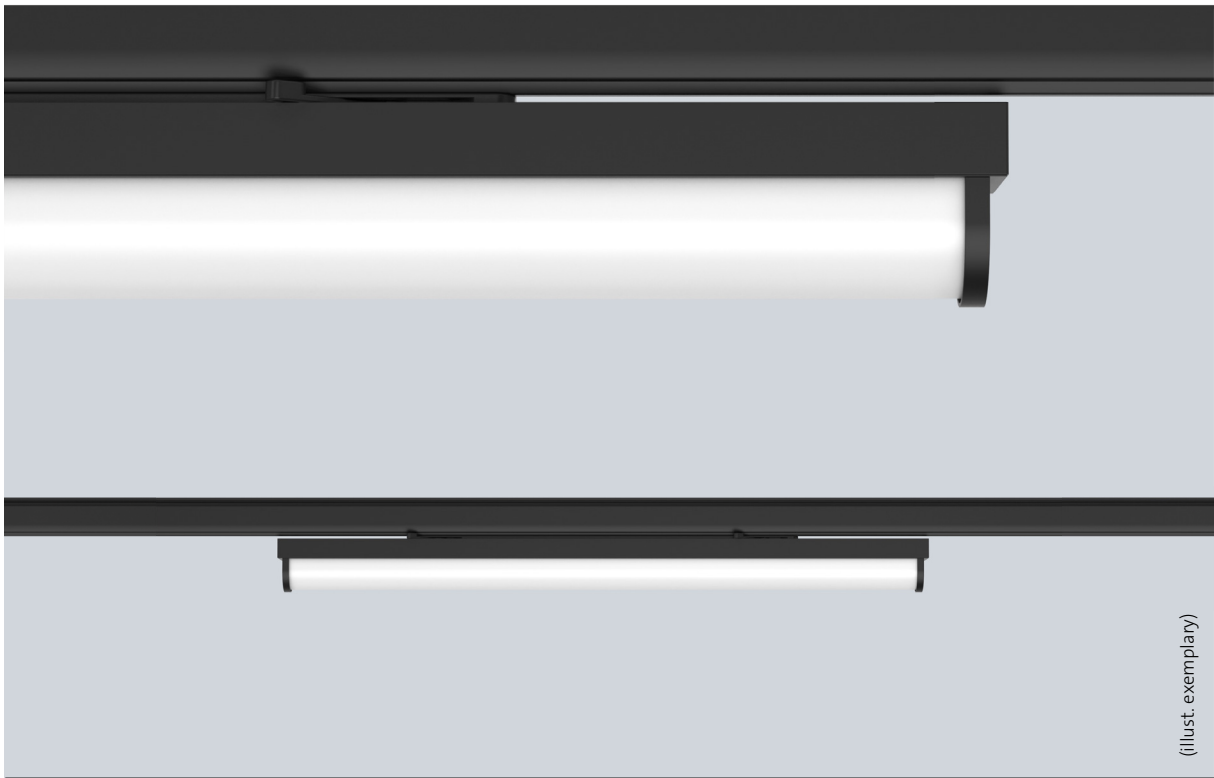

Design: Dirk Salewski, mawa

Matchcode	Performance in W ^{LED}	beam angle in degrees	Dimming Matchcode	Light colour and luminous flux ^{LED} in Kelvin and Lumen
ts-str2-600	21 W	diffuse	-1, -4	2700 K / 2514 lm, 3000 K / 2640 lm
ts-str2-1200	42 W	diffuse	-1, -4	2700 K / 5029 lm, 3000 K / 5280 lm

(further light colours on request)

Dimming match code abbreviations: -1 switchable / -4 DALI

Ra
>95


dim

IP20

tesechzehn | ts-str2-600 /-1200

LINEAR LUMINAIRE FOR TRACK SYSTEMS

Dimensions:

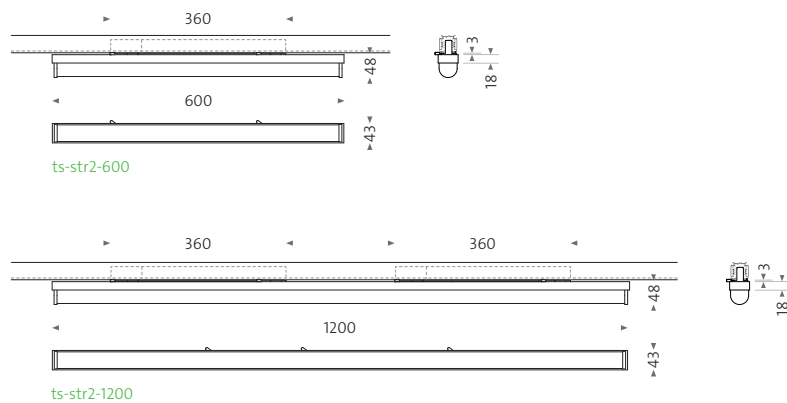

Colour:

- ☐ white matt (RAL 9016)
- ☐ black matt (RAL 9005)
- individual RAL color on request

Housing:	Aluminium housing powder-coated, housing with satin PMMA diffuser
Track adapter:	1 × Allokating 3-circuit track adapter Products are suitable for use in Powergear 3-circuit track systems PRO-06 and PRO-R6.
LED modules:	ts-str2-600: LED-Modules / Ra > 95 ts-str2-1200: LED-Modules / Ra > 95
Life time:	L80 > 50.000 h (IES LM-80 / TM-21)
Control gear:	included
Operating area:	AC 220V–240V / 50Hz–60Hz
Protection class:	I
Degree of protection:	IP20
Weight:	ts-str2-600: ca. 1.124 g ts-str2-1200: ca. 1.924 g