



wittenberg 4.0 | wi4-eb-1r-dl-IP44

EINBAULEUCHE FÜR DECKE

wittenberg 4.0 – kompakte Bauform, filigranes Gehäuse, größte Gestaltungsvielfalt
Leuchterserie für anspruchsvolle Beleuchtungsaufgaben und den hochwertigen privaten Bereich



Design: Jan Dinnebier, mawa / Engineering: mawa

Produkt- variante	Leistung in W ^{LED}	Abstrahlwinkel in Grad	mögliche Konverter erhältlich für	Schalt- gruppen	Lichtfarben und Lichtstrom ^{LED} in Kelvin und Lumen
HighCRI	12,7 W	12°/ 24°/ 38°	-4, -7, -9	SG1	2700 K/930 lm, 3000 K/980 lm, 4000 K/1100 lm
d2w	12 W	12°/ 24°/ 38°	-4, -9	SG1	1800-3000 K/1045 lm
(Wechseloptiken mittels Saugheber oder Silikonpad austauschbar)			(weitere Lichtfarben auf Anfrage)		


Matchcode-Kürzel für Dimmungen: -2 Drehpotentiometer am Gehäuse / -4 DALI / -7 Phasenan- und abschnitt / -9 Bluetooth



wittenberg 4.0 | wi4-eb-1r-dl-IP44

EINBAULEUCHTE FÜR DECKE

Dimensionen:

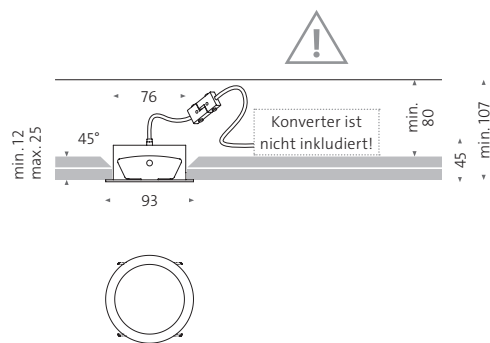

Deckenausschnitt Ø 80 mm
Bei 25 mm Deckenstärke muss die obere
Rigipsplatte angeschrägt werden



Farbe:

- ☒ schwarz matt (RAL 9005)
- ☐ weiß matt (RAL 9016)

Gehäuse: Aluminium pulverbeschichtet weiß oder schwarz matt
(individuelle RAL-Farben auf Anfrage)

Lichtquelle: 1 × standard-LED (High CRI) Ra > 95 (typ. 98)
1 × dim2warm-LED, Ra > 95 (typ. 97)

Lebensdauer: Standard-LED: L90 (10 k) > 61.000 h (IES LM-80 / TM-21)
dim2warm-LED: L80 (10 k) > 50.000 h (IES LM-80 / TM-21)

Betriebsgerät: exklusive

Betriebsbereich: Standard-LED: DC / 700 mA / Vf 18 V
dim2warm-LED: DC / 350 mA / Vf 36,5 V

Zubehör: (aktuell ist kein passendes Zubehör verfügbar)

Schutzklasse: Leuchte (18Vdc): III / Betriebsgerät: II

Schutzart: IP44 nur bei Überkopfmontage

Gewicht: 180 g

LVK auf mawa-design.de unter Leuchten



wittenberg 4.0 | wi4-eb-1r-dl-IP44

RECESSED SPOTLIGHT FOR CEILING

wittenberg 4.0 – compact dimensions, minimalist design and maximum design versatility
Luminaire series suitable for both high-end private use and sophisticated specialized applications



Design: Jan Dinnebier, mawa / Engineering: mawa

Product variants	Performance in W ^{LED}	lenses with beam angle in degrees	optional converters available for	Lighting Circuits	Light colour and luminous flux ^{LED} in Kelvin and Lumen
HighCRI	12,7 W	12°/ 24°/ 38°	-4, -7, -9	LC1	2700 K/930 lm, 3000 K/980 lm, 4000 K/1100 lm
d2w	12 W	12°/ 24°/ 38°	-4, -9	LC1	1800-3000 K/1045 lm
(exchangeable by means of vacuum cup or silicone pad)			(further light colours on request)		


Dimming match code abbreviations: -2 Rotary potentiometer on housing / -4 DALI / -7 Leading edge/trailing edge dimmable / -9 Bluetooth



wittenberg 4.0 | wi4-eb-1r-dl-IP44

RECESSED SPOTLIGHT FOR CEILING

Dimensions:

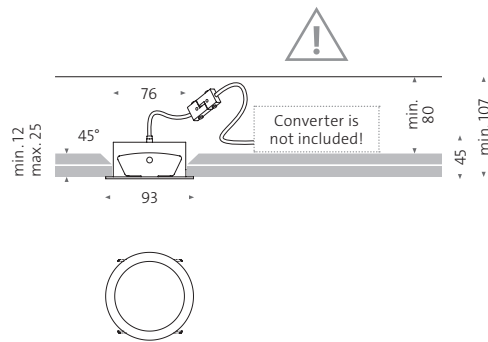

Ceiling cut-out Ø 80 mm
If the ceiling thickness is 25mm, the top drywall sheet must be angled.



Colour:

- ☒ black matt (RAL 9005)
- ☐ white matt (RAL 9016)

Housing: Aluminium housing powder-coated, white or black matt
(individual RAL colours on request)

Light source: 1 × standard-LED (High CRI), Ra > 95 (typ. 98)
1 × dim2warm-LED, Ra > 95 (typ. 97)

Life time LED: Standard-LED: L90 (10 k) > 61.000 h (IES LM-80 / TM-21)
dim2warm-LED: L80 (10 k) > 50.000 h (IES LM-80 / TM-21)

Control gear: not included in delivery

Operating area: Standard-LED: DC / 700 mA / Vf 18 V
dim2warm-LED: DC / 350 mA / Vf 36,5 V

Accessories: (Currently, no suitable accessories are available.)

Protection class: luminaire (18Vdc): III / LED driver: II

Degree of protection: IP44 only for overhead mounting

Weight: 180 g

LDC on mawa-design.de under Lighting